


# peanut.

patterns


## 049 FINLEY HOODY

A cozy raglan hoody! Sleeve and body hem is finished with a band. Hood is unlined, with a center front cross over.


This pattern is created for beginners and can be sewn with a single needle home sewing machine.



Preemie to  
12 Years



No Serger  
Needed



Knit Fabric Only

# GETTING STARTED WITH PDF PATTERNS

## 1. READ THE CRITICAL PDF PATTERN PRINTING INFORMATION PAGES

Your success starts with your pattern—make sure you are printing it correctly.

## 2. PIECE YOUR PATTERN

The pattern is a separate PDF file, not attached to these instructions. On the first page of your pattern, there is a 2" x 2" test square. Measure this square with a ruler to verify that the pattern is the correct size and then cut out each 7" x 9.5" rectangle. Tape the pieces together, matching the colors/letters/numbers. If you need a visual, go to:

<https://peanutpatterns.com/how-to-print-and-piece-together-a-pdf-pattern/>

## 3. GRAINLINE

These arrows on your pattern pieces indicate your grainline, which you should align with the grain of your fabric before cutting. Have you not seen the second arrow before? It means you need to fold your fabric along the grain then cut. You see this arrow on half-pattern pieces that are cut on the fold.



## 4. FIND YOUR SIZE

Use the size chart to find the correct size. If between sizes, you can draw a new pattern line between the two sizes or simply choose the larger size. Cut out the size you are making from the pattern, then trace the pattern edges onto your fabric by using chalk, pencil, or carbon paper (referencing the layout guide). Transfer all markings, notches, and center front and back lines. Trust us. It's no fun to have to come back and mark them later. After you're done, cut out your pieces.

## 5. SEAM ALLOWANCE

When sewing, use a 3/8" (1cm) seam allowance unless the sewing instructions state otherwise. Using the incorrect seam allowance will result in size issues. All patterns already include this seam allowance, and it should not be added to the pattern.

## 6. TERMS OF USE/LICENSE/DISCLAIMER

You cannot resell, under any circumstance, our digital PDF files or copy our images. That is a blatant copyright infringement and we will recoup damages legally. However, there are no physical garment limitations. Sell any physical garments made with our patterns.

While there is no limitation with physical items, every pattern purchased is a license for only one person. You can't pass out the pattern at your sewing group unless everyone buys a copy.

This pattern is offered as is without any warranty. Peanut Patterns is not liable for any damage derived from using this pattern. By using this pattern, you agree to the terms of this license. Please reach out to [lauren@peanutpatterns.com](mailto:lauren@peanutpatterns.com) with any questions.

# CRITICAL PDF PATTERN PRINTING INFORMATION

## ALWAYS PRINT FROM A COMPUTER, NEVER A PHONE OR TABLET

Phones and tablets are not set up to have advanced print settings, which are required when printing PDF patterns. It is always best to print from a laptop or computer.

## ALWAYS DOWNLOAD THE PDF PATTERN TO YOUR DESKTOP

Download the PDF pattern, and save it to your desktop. Then, open the file using a PDF viewer (NOT a browser), and click print. Printing from a browser results in margin errors.

## NEVER PRINT FROM A BROWSER (CHROME, INTERNET EXPLORER, FIREFOX, ETC.)


Browsers are meant to provide quick printing and do not have robust settings which are needed for PDF patterns. Adobe Acrobat Reader is a great free PDF viewer.

## MAKE SURE THE SCALE PRINT SETTING IS SET TO 100% SIZE

If you use the default print settings, such as "fit to printable area" your test square will not measure 2" x 2" and your pattern will be incorrect. You must ALWAYS adjust the scale for PDF patterns to be 100% size when printing.

### PRINT SETTINGS VARY BY PROGRAM


*Three different examples are below, but the scale setting should always be set to 100% scale before printing*

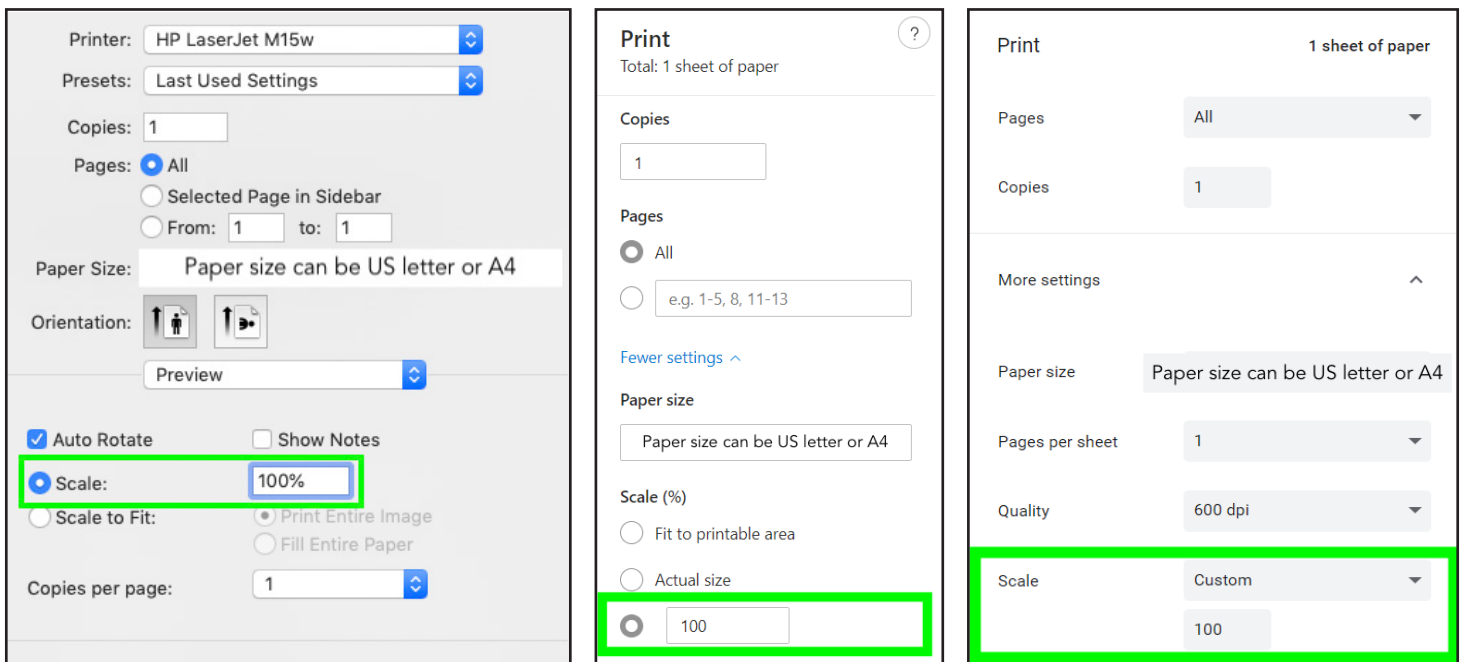

# CRITICAL PDF PATTERN PRINTING INFORMATION CONT.

## MAKE SURE THE MARGINS ARE CORRECT

This setting is typically auto-adjusted, and you don't need to worry about it. However, if your pattern looks like the incorrect image below, the print margin setting is incorrect, and the printer is trying to print outside the printable area. This is typically caused by printing from a mobile device or printing from an internet browser (not downloading the PDF file to a desktop first, or not using a PDF viewer). Google is a great resource to learn more about adjusting your margin setting, as this varies by the printer and your PDF viewing program.

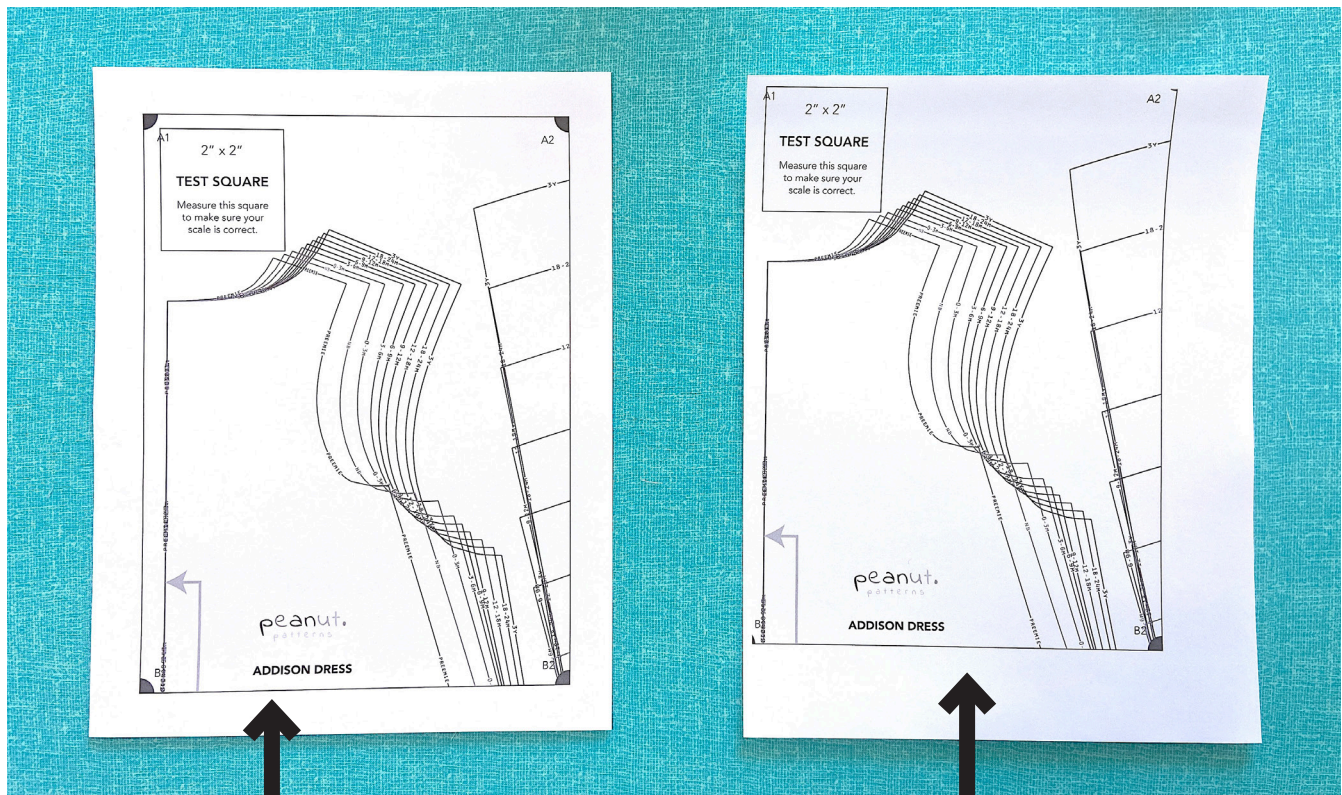

**CORRECT**

*The PDF pattern is centered, and the bounding box is fully visible*

**INCORRECT**

*The PDF pattern is cut off, and the bounding box is not visible on the top, or left edge. There is too much room on the right and bottom side.*

## MEASURE YOUR TEST SQUARE (SERIOUSLY, NEVER SKIP THIS STEP)

Measure the test square on the first page of your pattern. It should measure 2" x 2". Anything else is incorrect, and you should reprint. You can print the first page of a pattern to verify scale/print settings before printing off the full pattern to save paper. Please note each PDF pattern technically starts on page 2, as page 1 is always a layout guide.

## SUPPLIES

- Knit fabric
- Polyester thread

## TOOLS

- Fabric scissors
- Pins
- Chalk or marking pen
- Tape (for piecing pattern)
- Paper scissors (to cut pattern)

Use knit fabric that is a light to medium weight. It can be interlock, jersey, french terry, fleece or double knit.

## PATTERN LAYOUT GUIDE + FABRIC USAGE

Layout the pattern pieces using the guide. You will need to re-fold and position the fabric after marking each piece. This will ensure the highest marker yield. Do not cut until you are sure every piece is accounted for. Use either pins or pattern weights to keep your pattern in place. Pay attention to the fabric grainline and if using a plaid or stripe fabric make sure to line up the stripes.

### BODY + SLEEVE PIECES:


**SIZE PREEMIE TO 6-9 MONTHS-** 1/3 YARD OF FABRIC (45" OR 60" WIDE)

**SIZE 9-12 MONTHS TO 12-18 MONTHS-** 3/8 YARD OF FABRIC (60" WIDE)

**SIZE 18-24 MONTHS TO 5 YEARS-** 1/2 YARD OF FABRIC (60" WIDE)

**SIZE 6 YEARS TO 10 YEARS-** 5/8 YARD OF FABRIC (60" WIDE)

**SIZE 12 YEARS-** 2/3 YARD OF FABRIC (60" WIDE)

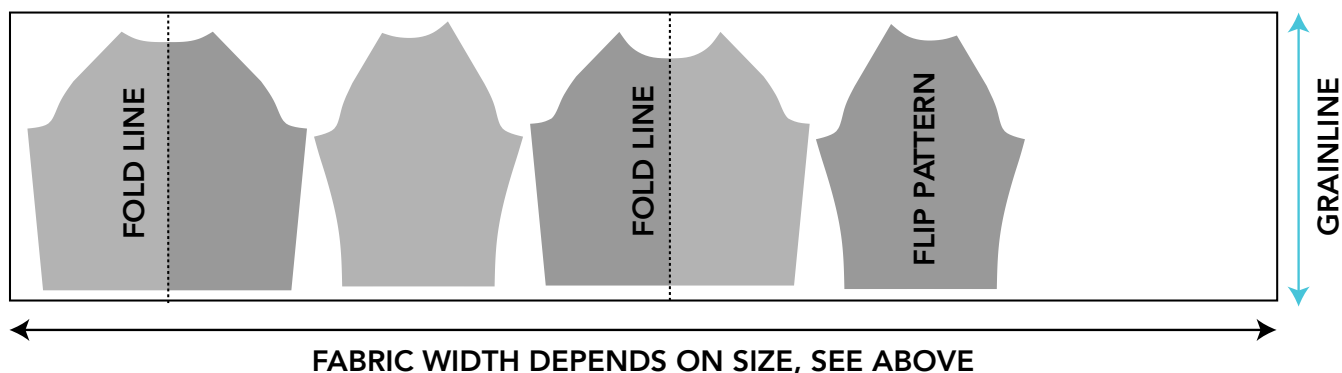


## BAND PIECES:

**SIZE PREMIE TO 7 YEARS-** 1/4 YARD OF FABRIC (45" OR 60" WIDE)

**SIZE 8 YEARS TO 12 YEARS-** 1/4 YARD OF FABRIC (50" WIDE MINIMUM)

You can buy a different color/print fabric to make contrasting band pieces, or you can add this yardage to the body fabric.

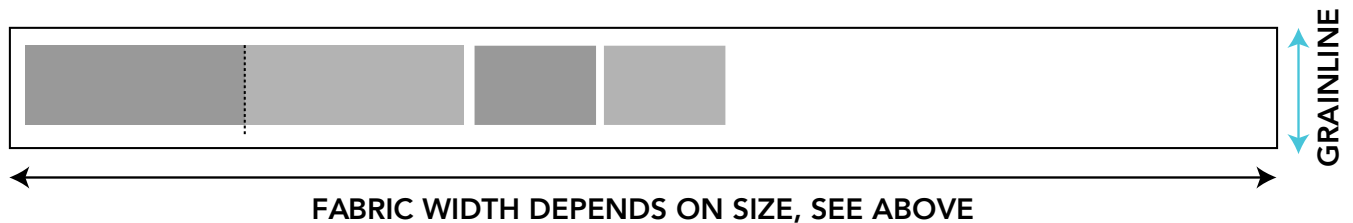


## HOOD PIECES:

**SIZE PREMIE TO 9-12 MONTHS-** 1/3 YARD OF FABRIC (45" OR 60" WIDE)

**SIZE 12-18 MONTHS TO 7 YEARS-** 3/8 YARD OF FABRIC (45" OR 60" WIDE)

**SIZE 8 YEARS TO 12 YEARS-** 1/2 YARD OF FABRIC (45" OR 60" WIDE)

You will need the above usage in addition to the body/sleeve and band piece usages.

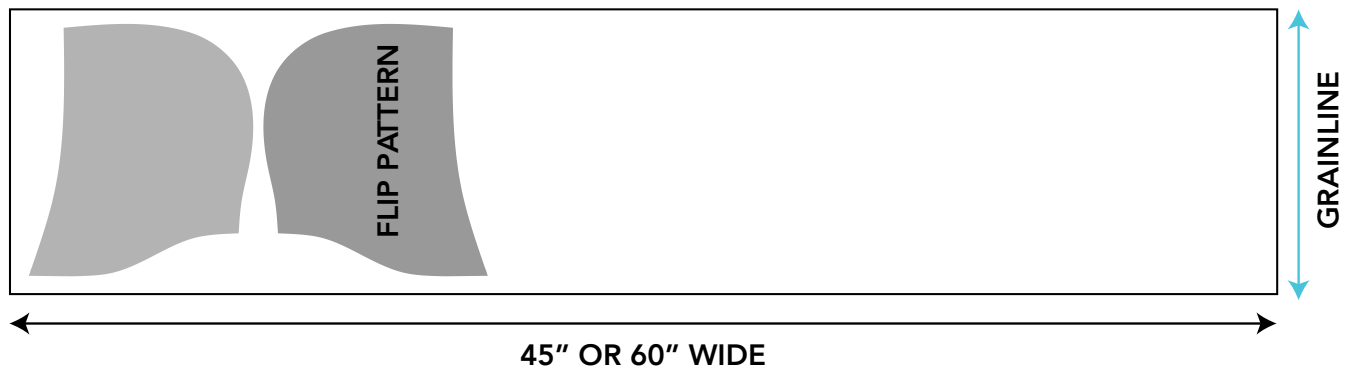

*EXAMPLE: If you are making the hoody with a contrasting band in size 9-12 months you will need:*

*3/8 yard plus 1/3 yard of fabric for the body/sleeve/hood pieces.*

*1/4 yard of contrast fabric for the band pieces.*

## STITCHES

There are only three types of stitches we use in our patterns. These are the straight stitch, zig-zag and knit overcast (see photo to right) which mimics a zig-zag and straight stitch together. You may also use a serger if that is what you're comfortable with.


You will see the below stitch types next to the sewing steps to help you know which stitch we are using:

(SS) for straight stitch

(ZZ) for zig-zag

(KO) for knit overcast

After sewing with the knit overcast (KO), trim the seam allowance to be near the edge of the stitch. Be careful to not actually cut the stitch. This will reduce bulk. Do not trim if sewing knit binding.

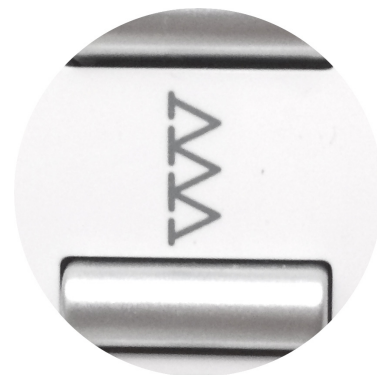

## MEASURING

It is recommended to determine the size by measuring your kiddo, not the clothing size you buy at the store.

When measuring, it is best to use a flexible measuring tape. The tape should be just snug enough so it won't slide down. All measurements should be taken level with the ground.


**Chest-** wrap the tape measure around the fullest part of the chest, under the armpits.

**Waist-** wrap the tape measure around the narrowest part of the waist. Typically near the belly button.

**Hip-** wrap the tape measure around the fullest part of the hip/buttocks area.

**Inseam-** the crotch point to the floor.

**Height-** top of the head to the floor.

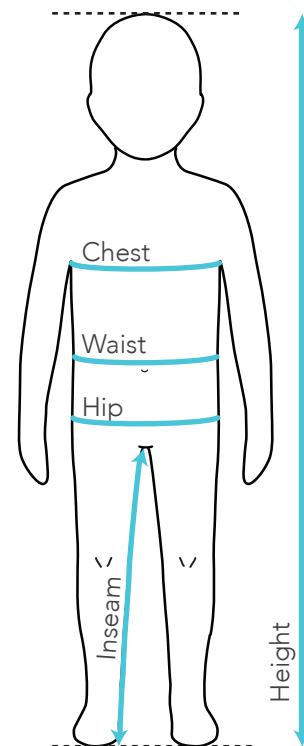

Compare all measurements against the size chart (next page).

## SIZE CHART

SIZE	CHEST	WAIST	HIP	INSEAM	HEIGHT
Preemie	13 3/4" (35cm)	14" (35.5cm)	14" (35.5cm)	5 1/8" (13cm)	17 1/2" (44.5cm)
Newborn	15 1/2" (39.4cm)	16" (40.6cm)	16" (40.6cm)	6 3/4" (17.15cm)	20 1/2" (52cm)
0-3 Months	17" (43.2cm)	17 1/2" (44.5cm)	17 1/2" (44.5cm)	8 1/2" (21.6cm)	24" (61cm)
3-6 Months	18" (45.7cm)	18 1/2" (47cm)	18 1/2" (47cm)	10" (25.4cm)	27" (68.6cm)
6-9 Months	18 1/2" (47cm)	19" (48.3cm)	19" (48.3cm)	11 1/4" (28.6cm)	29" (73.7cm)
9-12 Months	19" (48.3cm)	19 1/2" (49.5cm)	19 1/2" (49.5cm)	12" (30.5cm)	30 1/2" (77.5cm)
12-18 Months	19 3/4" (50.2cm)	20 1/4" (51.4cm)	20 1/4" (51.4cm)	13 1/2" (34.3cm)	33" (83.9cm)
18-24 Months (Same as 2 Years)	20 1/2" (52cm)	21" (53.3cm)	21" (53.3cm)	14" (35.6cm)	35" (89cm)
3 Years	21" (53.3cm)	21 1/2" (54.6cm)	22" (56cm)	15 1/2" (39.4cm)	38" (96.5cm)
4 Years	22" (56cm)	22" (56cm)	23" (58.5cm)	17" (43.2cm)	41" (104.1cm)
5 Years	23" (58.5cm)	22 1/2" (57.2cm)	24" (61cm)	18 3/4" (47.6cm)	44" (111.8cm)
6 Years	24" (61cm)	23" (58.6cm)	25" (63.5cm)	20 1/4" (51.4cm)	46 1/2" (118.1cm)
7 Years	25 3/4" (65.4cm)	23 1/2" (59.7cm)	27" (68.6cm)	23 1/8" (58.7cm)	50" (127cm)
8 Years	26 3/4" (67.9cm)	24 3/8" (61.9cm)	28 1/8" (71.4cm)	24 3/8" (62cm)	52 1/4" (132.7cm)
10 Years	28" (71.1cm)	25 1/4" (64.1cm)	29 1/2" (74.9cm)	25 3/4" (65.4cm)	55 1/4" (140.3cm)
12 Years	29 1/4" (74.3cm)	26 1/4" (66.7cm)	31 1/4" (73.4cm)	27 1/2" (69.9cm)	58 1/4" (148cm)

**NOTE:** Our patterns are sized by age and do not follow a retail size system. When you buy clothing at the store, designs are created for specific buckets of consumers. Preemie to 18-24M is for babies, 2T to 6T is for toddlers, and sizes 7 and up is for young kids. Most retail designs are created for their respective consumer bucket only, but sewing patterns span all these consumer buckets, so age is used instead. For example, if you look at most retail size charts, 18-24M and 2T have the same body measurements. The difference is in the design/target consumer.




**CRITICAL READ BEFORE STARTING:** When sewing, use a 3/8" (1cm) seam allowance unless the sewing instructions state otherwise. Using the incorrect seam allowance, such as 1/4", will result in size issues.



1



2

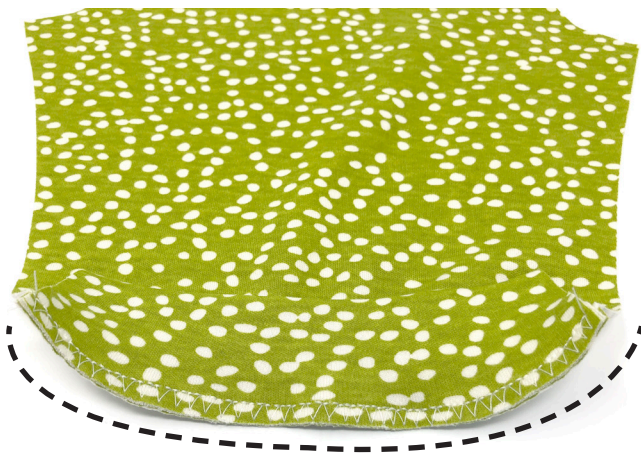


3




4

- ☒ 1. Fold the sleeve band in half along the longest edge, wrong sides together.
- ☐ 2. Line up the raw edge of the sleeve band with the raw edge of the sleeve hem, right sides together. You will need to stretch the band to have it align with the bottom of the sleeve as it is smaller to create negative ease. Pin to make it easier.
- ☐ 3. Stitch along the sleeve hem edge (KO). Trim down the seam allowance, being careful to not clip the stitch.
- ☐ 4. Align one sleeve with the front body along the raglan seam, right sides together. Make sure you are aligning the front raglan sleeve seam, NOT the back. It is marked in the pattern.

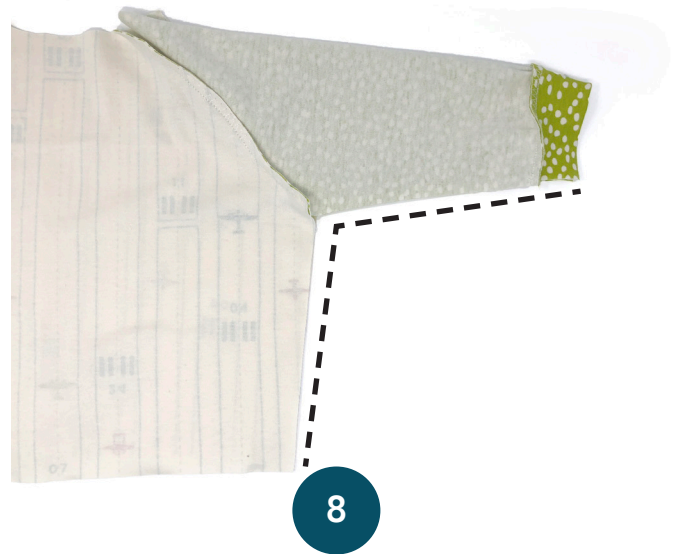

- 5. Match the second sleeve to the other front raglan seam, pinning if needed. Stitch along the front raglan seams (KO). Then trim down the seam allowance.
- 6. Match the back raglan sleeve seams with the back body, right sides together. Stitch (KO) and trim down the seam allowance. Press open your raglan seams.
- 7. Make sure your body is wrong side out. Match up the underarm and side seams, right sides together.
- 8. Stitch along the underarm and side seams (KO). Trim the seam allowance.

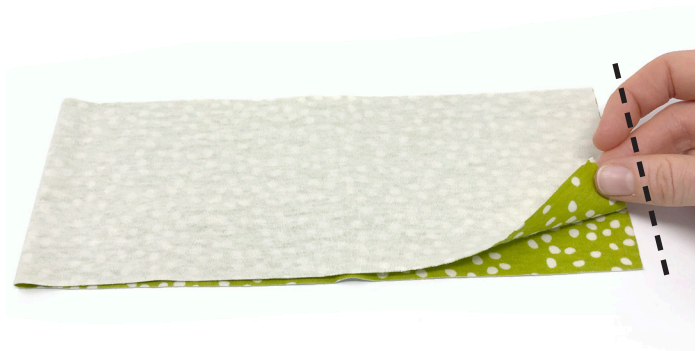

9



10



**MARK OR PIN BOTH SIDES**

11



12

- 9. Fold the hem band in half along the shortest edge, right sides together. Then stitch along the edge (KO). Trim down the seam allowance.
- 10. Fold the waistband onto itself, so the raw edges are aligned and the hem band is right side out.
- 11. Mark your hem band seam with a pin. Pin the opposite side as well.
- 12. Place the body in the center of the hem band loop, aligning the raw edges. Align the hem band pins (step 11) with the side seams of the body.



13



14




15




16

- 13. Pin the hem band to the rest of the body, stretching and evenly distributing ease as you go.
- 14. Stitch together (KO), then trim the seam allowance.
- 15. Align your hood pieces along the curved edge, right sides together. Stitch along the curved edge from the neckline to the front opening (KO). Trim down the seam allowance.
- 16. Fold the front hood edge to the inside 3/4". Pin if needed.

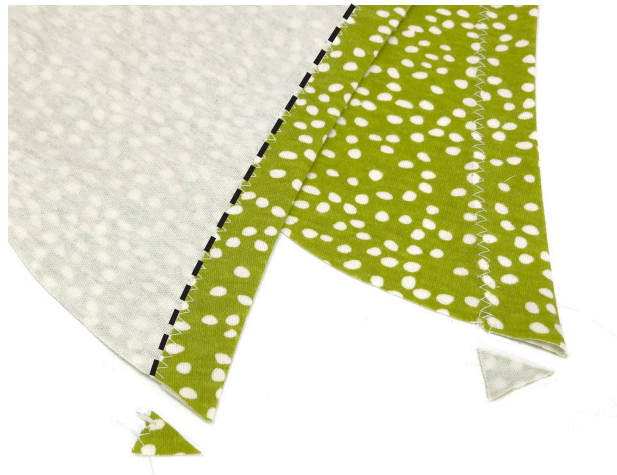

17

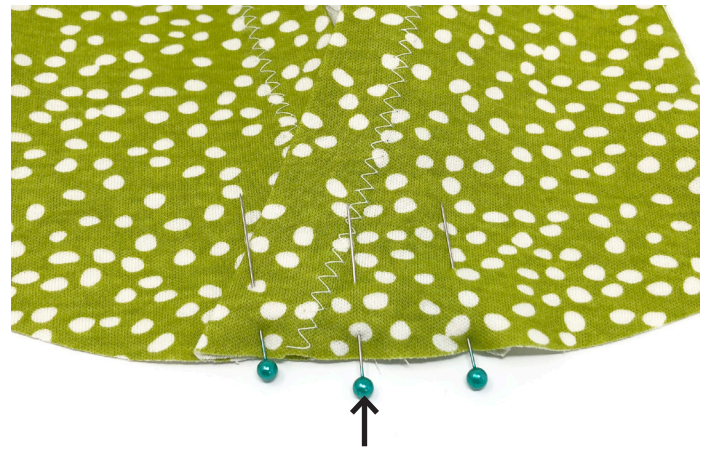

CENTER FRONT

18




19



20

- 17. Stitch the front hood edge (ZZ), and trim off the excess points at the neckline.
- 18. Turn your hood right side out, and overlap the front hood points at center front (marked on the pattern). Pin on either side to secure.
- 19. Mark the center front and back on your body pieces using pins. Make sure your body is wrong side out.
- 20. Place the hood inside the body, with the right side of the body touching the exterior side of the hood. The hood neckline will align with the body neckline. Match the center front and back body pins with the hood. Pin in place then stitch along the neckline (KO). Trim down the seam allowance.

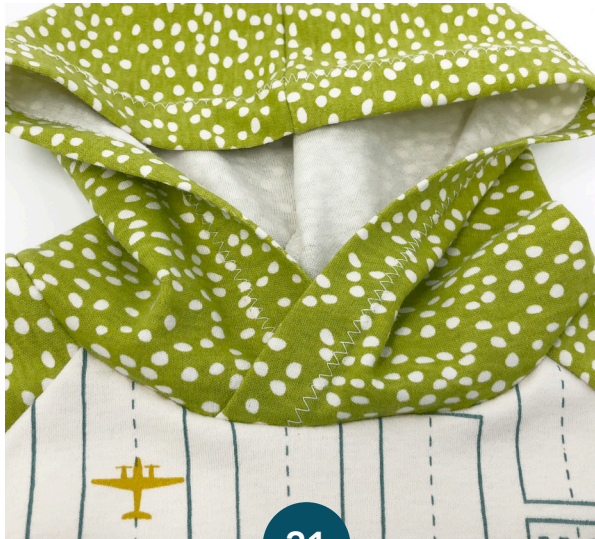

- 21. Turn your hoody right side out, and press up the hood.
- 22. Stitch along the neckline, catching the seam underneath (SS). You're done!